

FBT-10-50000

0.01~50GHz

Features:

- * Broadband
- * Small Size

Applications:

- * Telecom
- * Satcom
- * Laboratory Test
- * Instrumentation

Electrical

Frequency Range:	0.01~50GHz
Insertion Loss:	3dB max.
Isolation:	30dB typ.
VSWR:	2 max.
DC Voltage:	40V max.
DC Current:	0.5A max.
RF Input Power:	2W min.

Mechanical


Size ^{*1} :	20*12*10mm 0.787*0.472*0.394in
Connectors:	2.4mm Female SMB Female
Mounting:	4-Φ1.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+105°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

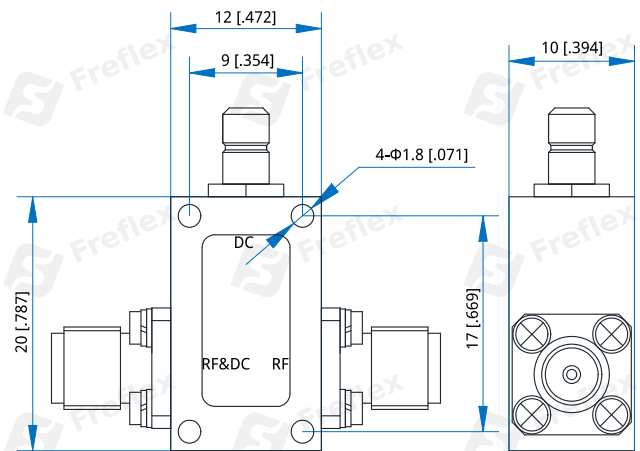

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FBT-10-50000

Customization is available upon request.