

FBT-100-26500-S-01

0.1~26.5GHz

Features:
 * Broadband
 * Small Size

Applications:
 * Telecom
 * Satcom
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	0.1~26.5GHz
Insertion Loss:	1.2dB max.
VSWR:	2 max.
Voltage:	+10V DC
RF Input Power:	1W max.

Mechanical


Size ^{*1} :	14.7*14.7*9.1mm 0.579*0.579*0.358in
Connectors:	SMA
Power Supply & Control Interface:	Solder Pin & Terminal Post
Mounting:	2-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

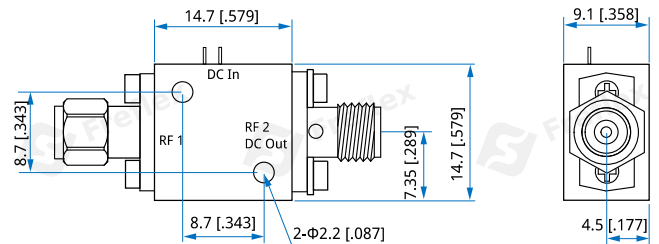

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBT-100-26500-S-01

Customization is available upon request.