

FBT-30K-43000

30KHz~43GHz

Features:
 * Broadband
 * Small Size

Applications:
 * Telecom
 * Satcom
 * Laboratory Test
 * Instrumentation

Electrical


Frequency:	30KHz~43GHz
Insertion Loss	3.5dB max.
VSWR:	2 max.
DC Isolation:	30dB typ.
Voltage:	50V typ.
Current:	750mA max.
Inductance:	220uH typ.
DC Impedance:	1.2Ω typ.

Mechanical

Size ^{*1} :	36.07*15.24*12.7 1.42*0.6*0.5in
RF Connectors:	2.92mm female
DC Connectors:	SMA female
Mounting:	2-Φ2.54mm through-hole

[1] Exclude connectors.

Outline Drawings

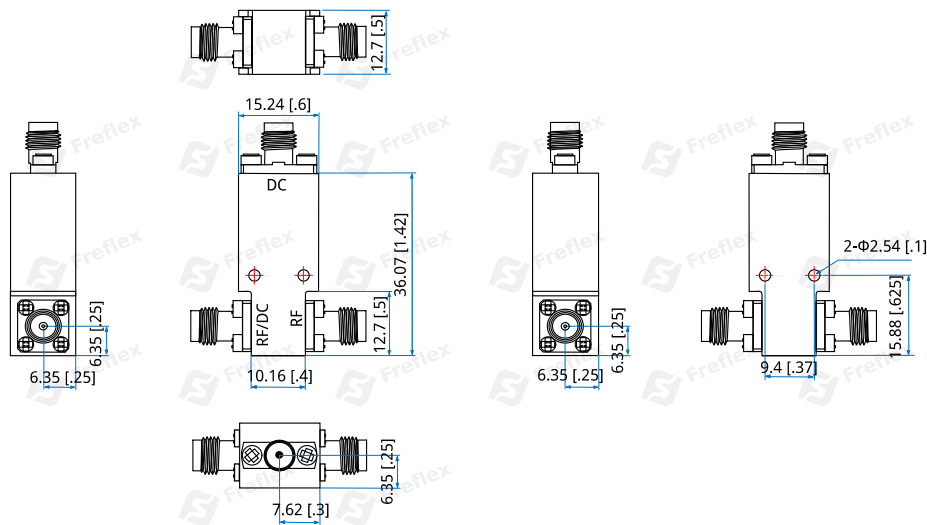

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

FBT-30K-43000

Customization is available upon request.