

# FBT-5000-20000

5~20GHz

Features:  
 \* Broadband  
 \* Small Size

Applications:  
 \* Telecom  
 \* Satcom  
 \* Laboratory Test  
 \* Instrumentation

## Electrical

Frequency:	5~20GHz
Insertion Loss:	0.7dB max.
VSWR:	2 max.
Voltage:	+10V DC
Current:	0.2A

## Mechanical


Size <sup>*1</sup> :	14.7*14.7*9.1mm 0.579*0.579*0.358in
Connectors:	SMA
Power Supply & Control Interface:	Solder Pin & Terminal Post
Mounting:	2-Φ2.2mm through-hole

[1] Exclude connectors.

## Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

## Outline Drawings

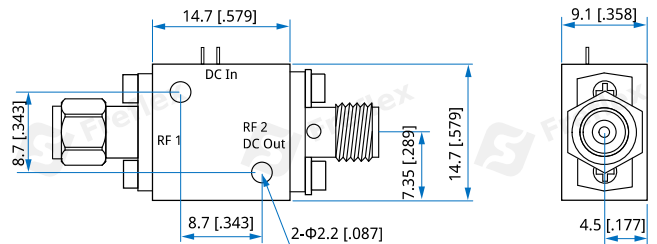

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

## How To Order

**FBT-5000-20000**

Customization is available upon request.