

FBT-50K-40000

50KHz~40GHz

Features:

- * Broadband
- * Small Size

Applications:

- * Telecom
- * Satcom
- * Laboratory Test
- * Instrumentation

Electrical

Frequency Range:	50KHz~40GHz
Insertion Loss:	3dB max.
Isolation:	30dB typ.
VSWR:	2 max.
Voltage:	25V max.
Current:	0.5A max.
RF Input Power:	10W max.

Mechanical

Size^{*1}: 15*25*14mm
0.591*0.984*0.551in


DC&Control Connectors:	Solder Pin
RF Connectors:	2.92mm
RFIN:	DC & RF
RFOUT:	RF

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+105°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

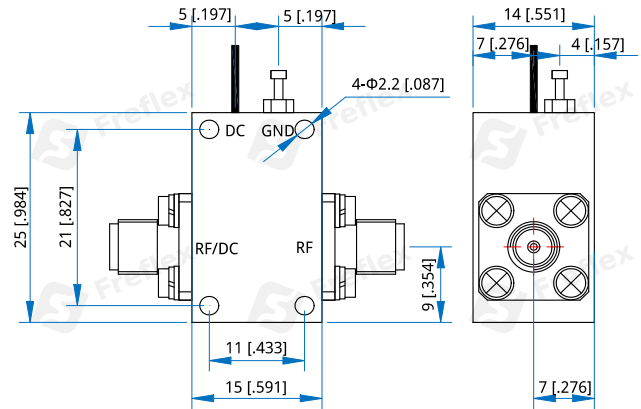

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FBT-50K-40000

Customization is available upon request.