

## FDRHA-2000-8000-5-S

2~8GHz, 5dB, SMA

Features:  
\* Broadband

Applications:  
\* Wireless  
\* Transceiver  
\* Laboratory Test  
\* Broadcast

### Electrical

Frequency:	2~8GHz
VSWR:	2.5 max.
Gain:	5dB min.
Beamwidth:	20° min. @H plane 20° min. @E plane
Polarization Isolation:	20dB min.
Average Power:	50W CW
Peak Power:	100W
Polarization Method:	Linear
Impedance:	50Ω

### Mechanical


Size:	111.5*102.2*75mm 4.39*4.024*2.953in
Material:	Aluminium
Connectors:	SMA female

### How To Order

**FDRHA-2000-8000-5-S**

Customization is available upon request.

### Outline Drawings

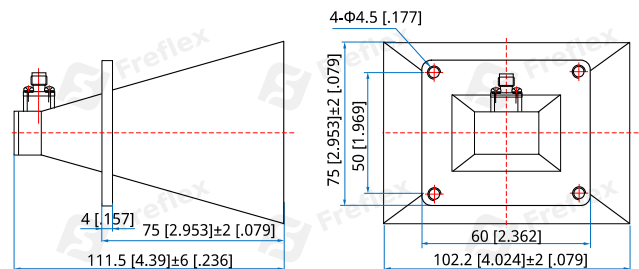

Unit: mm [in]

Tolerance: ±6mm [±0.236in]