

FC2-FRG-A360-1

2.4mm Female Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~50GHz
VSWR:	1.35 max.
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	500V RMS min.
Impedance:	50 Ω

Mechanical


RF Connector:	2.4mm female right angle
Mating Cable:	FA360
Outer Conductor:	Passivated stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated brass & Gold plated beryllium copper

How To Order

FC2-FRG-A360-1

Customization is available upon request.

Outline Drawings

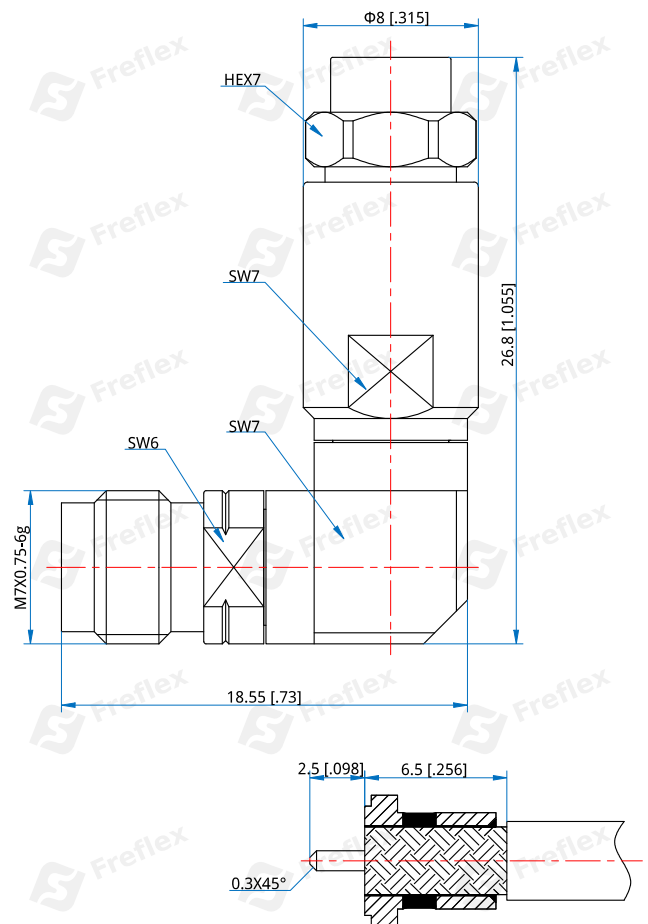

Unit: mm [in]
Tolerance: ± 0.5 mm [± 0.02 in]