

FC4-MB-A500-1

4.3-10 Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω

Mechanical

RF Connector:	4.3-10 male
Mating Cable:	QA480, QA500, QG500
Mating Life Cycle:	500 cycles
Outer Conductor:	Ternary plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental


Temperature:	-55~+165°C
--------------	------------

How To Order

[FC4-MB-A500-1](#)

Customization is available upon request.

Outline Drawings

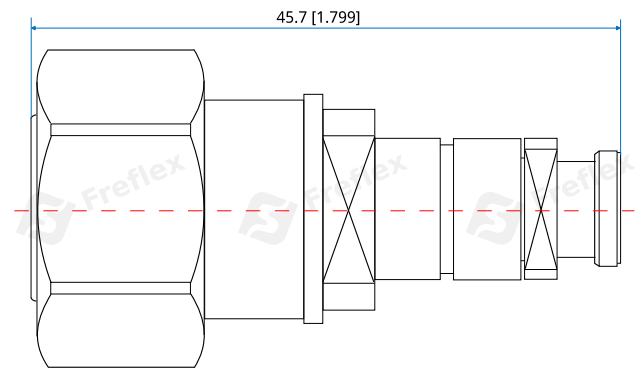

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]