

FC7-FL4B-B1500-1

7/16 DIN (L29) Female, 4-Hole Flange Mount

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC-6GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	2500V
Impedance:	50Ω


Mechanical

RF Connector:	7/16 DIN (L29) female
Mating Cable:	FB1500
Mating Life Cycle:	500 cycles
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE
Inner Conductor:	Tin phosphorus bronze silver plating

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

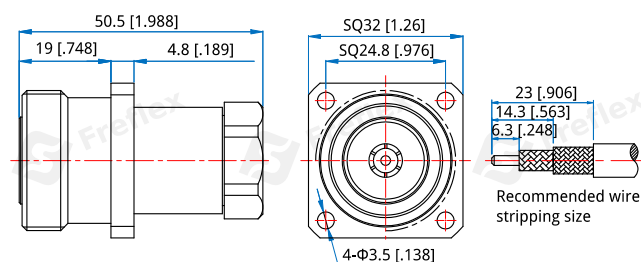

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FC7-FL4B-B1500-1

Customization is available upon request.