

FCB-MCB-RG214-1

BNC Male, Crimp

Features:

* Low VSWR

Applications:

* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Dielectric Withstanding	1000V
Voltage:	
Impedance:	50Ω

Mechanical

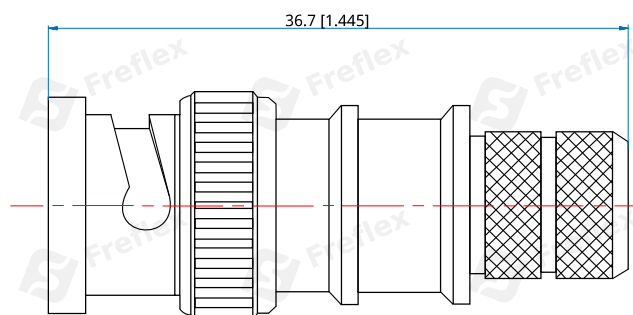
RF Connector:	BNC Male
Mating Cable:	RG214
Mating Life Cycle:	500 cycles
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

Environmental

Temperature:	-55~+165°C
--------------	------------

How To Order
FCB-MCB-RG214-1

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]