

FCK-FG-047-1

2.92mm Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~40GHz
VSWR: 1.35 max.
Impedance: 50Ω

Mechanical



RF Connector: 2.92mm female
Mating Cable: QA150, QH160, QD047, QE047
Outer Conductor: Passivated stainless steel

How To Order

FCK-FG-047-1

Customization is available upon request.

Outline Drawings

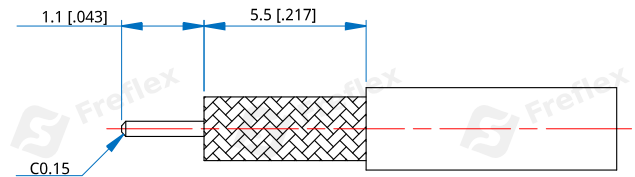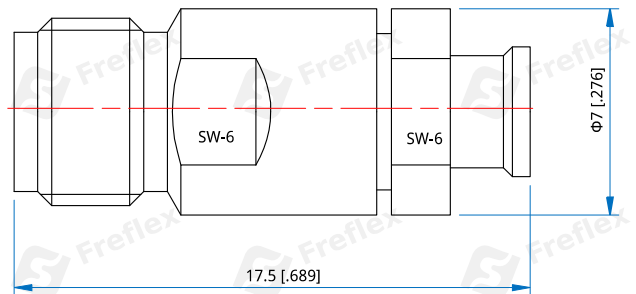

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]