

# FCN-MG-Y1000-1

## N Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~12.4GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	3000V DC
Impedance:	50Ω

### Mechanical

RF Connector:	N female
Mating Cable:	QY1000
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated stainless steel
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

### Environmental


Temperature:	-55~+165°C
--------------	------------

### How To Order

[FCN-MG-Y1000-1](#)

Customization is available upon request.

### Outline Drawings

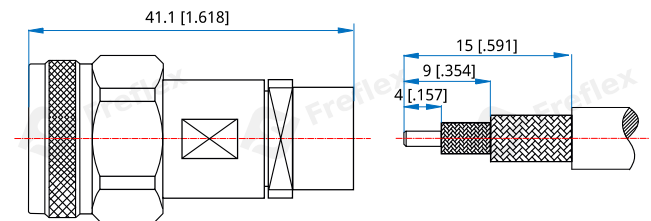

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]