

FCS-FG-A220-1

SMA Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~26.5GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical


RF Connector: SMA female
Mating Cable: QA220
Outer Conductor: 303F stainless steel

How To Order

FCS-FG-A220-1

Customization is available upon request.

Outline Drawings

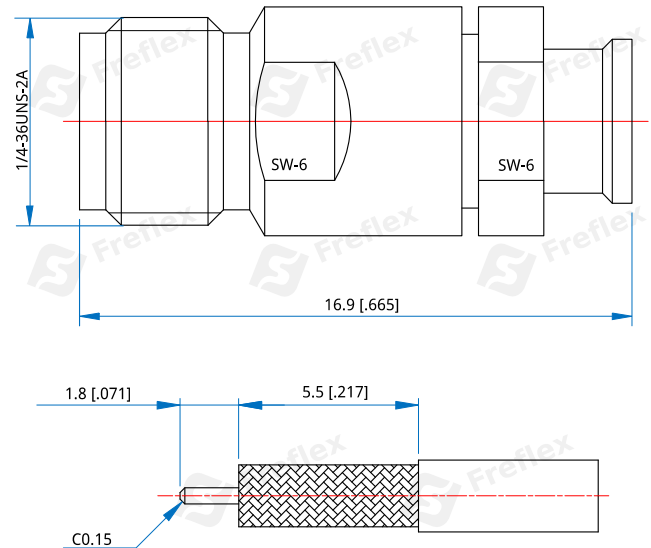

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]