

FCS-FRG-RG142-1

SMA Female Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~18GHz
VSWR: 1.35 max.
Impedance: 50Ω

Mechanical


RF Connector: SMA female right angle
Mating Cable: RG142, RG142U, RG223, RG58
Outer Conductor: Passivated stainless steel
Inner Conductor: Gold plated brass / Gold plated beryllium copper

How To Order

FCS-FRG-RG142-1

Customization is available upon request.

Outline Drawings

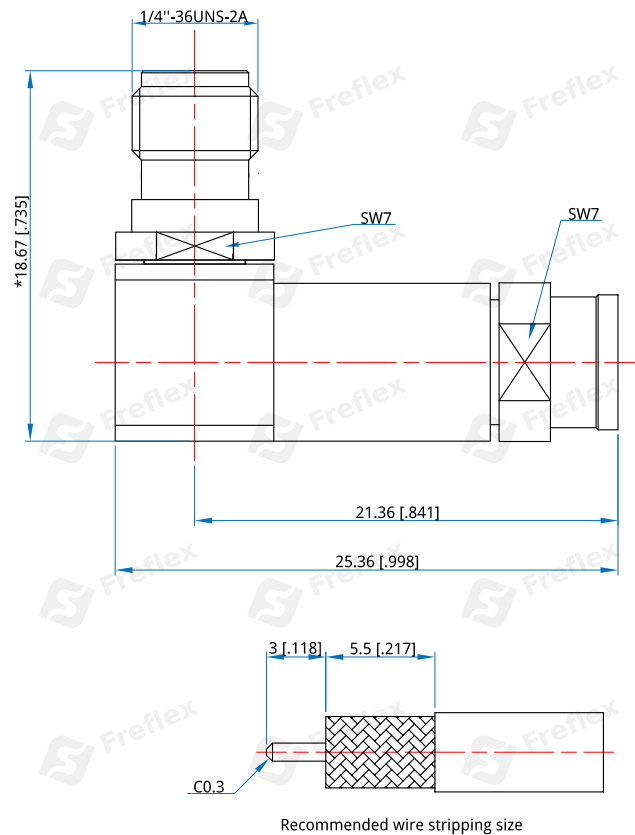

* Reference size.

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]