

FCT-FG-A360-1

TNC Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V rms min.
Impedance:	50Ω

Mechanical


RF Connector:	TNC female
Mating Cable:	QA360
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

How To Order

FCT-FG-A360-1

Customization is available upon request.

Outline Drawings

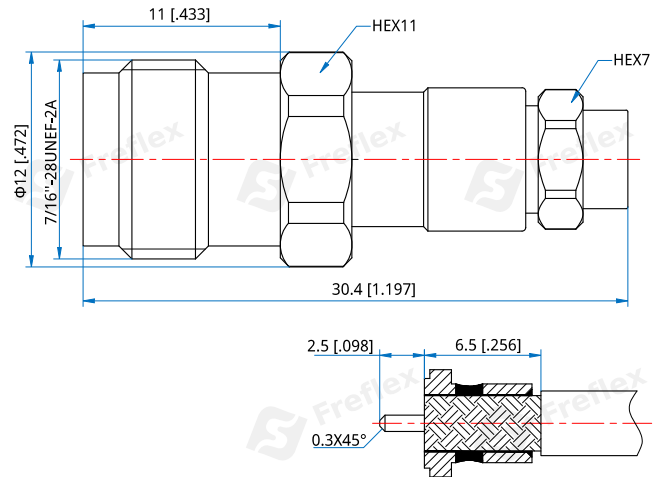

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]