

RG316

Low Cost

Features:
* Low Cost

Applications:
* Telecom
* Interconnect between equipment


Electrical

Frequency:	DC-6GHz
Impedance:	50Ω
Velocity of Propagation:	70%
Voltage Withstand:	600V DC
Capacitance:	96pF/m

Environmental

Temperature:	-55~+200°C
--------------	------------

Construction

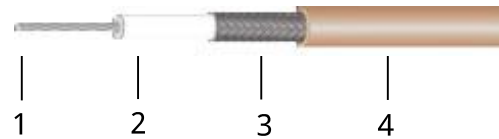

No.	Name	Size (mm)	Material
1	Inner Conductor	0.51	Stranded Silver-plated copper
2	Dielectric	1.5	FEP
3	Outer Shield	1.95	Silver-plated copper braid
4	Jacket	2.5	FEP

Attenuation

Frequency (GHz)	0.1	0.4	1	3	6
Attenuation*1 (dB/100m)	26.2	53.2	85.6	153.2	295

[1] VSWR:1.0; Ambient: +25°C (77°F)

Calculate Cable Attenuation: Attenuation (dB/100m) = $2.583794 * \sqrt{F} \text{ (MHz)} + 0.003893 * F \text{ (MHz)}$

Calculate Connector Attenuation: Attenuation (dB) = $0.03 * \sqrt{F} \text{ (GHz)}$

How To Order

RG316-X-Y-Z

X: Frequency in GHz

Y: Connector type

Z: Length in meters

Examples:

To order a RG316 cable assembly, DC-3GHz, SMA male to SMA female, 0.8 meter, specify RG316-3-SSF-0.8.

Connector naming rules:

S - SMA (6GHz, VSWR 1.4)

X - MMCX (6GHz, VSWR 1.4)

M - MCX (6GHz, VSWR 1.4)

B - BNC (4GHz, VSWR 2)

D - SMB (4GHz, VSWR 1.4)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)

Mating Connector

FCG-FB-086-1

SSMP female, Beryllium copper


FCG-FRB-086-2

SSMP female, Right angle, Beryllium copper


FCK-MG-086-3

2.92mm male, Stainless steel


FCK-FB-086-1

2.92mm female, Brass


FCK-FL2G-A220-1

2.92mm female, 2-hole flange mount, Stainless steel

FCK-FL4G-A220-1

2.92mm female, 4-hole flange mount, Stainless steel

FCP-FB-086-3

SMP female, Beryllium copper

FCP-FRB-086-1

SMP female right angle, Beryllium copper


FCP-FRB-086-2

SMP female right angle, Beryllium copper


FCA-MG-086-2

SSMA male, Stainless steel

FCA-FHB-086-1

SSMA female bulk head, Brass

FCS-FL2B-086-1

SMA female, 2-hole flange mount, Brass

FCS-FL4B-086-1

SMA female, 4-hole flange mount, Gold plated beryllium copper

FCS-FHB-086-2

SMA female bulk head, Gold plated brass


FCN-MB-086-1

N male, Nickel plated brass


FCN-FB-086-1

N female, Nickel plated brass


FCX-MB-086-1

MMCX male, Gold plated brass


FCX-MRB-086-1

MMCX male right angle, Gold plated brass


FCX-FB-086-1

MMCX female, Gold plated brass

FCM-MB-086-1

MCX male, Gold plated brass


FCM-MRB-086-2

MCX male right angle, Gold plated brass/beryllium copper


FCM-FB-086-1

MCX female, Gold plated brass

Flexible RF Cables & Assemblies

FCS-MB-086-4

SMA male, Gold plated brass

**FCB-MB-086-1**

BNC male, Ternary alloy plated brass

**FCS-MG-086-3**

SMA male, Stainless steel

**FCD-MB-086-1**

SMB male, Gold plated brass

FCS-MRG-086-1

SMA male right angle, Stainless steel

**FCD-MRB-086-1**

SMB male right angle, Gold plated brass

FCS-MRB-086-1

SMA male right angle, Gold plated brass

**FCD-FB-086-1**

SMB female, Gold plated brass

FCS-FB-086-2

SMA female, Gold plated brass

**FCD-FRB-086-1**

SMB female right angle, Gold plated brass