

FCPHA-26500-40000-20-K

26.5~40GHz, 20dB, 2.92mm

Features:

- * High Gain
- * Robust & Easy to Feed
- * Low Sidelobes

Applications:

- * Radar
- * EMC/EMI Testing
- * Radio


Electrical

Frequency:	26.5~40GHz
Gain:	20dB
VSWR:	1.6 max.
Polarization:	Left hand circular polarization

Mechanical

Connectors:	2.92mm Female
Material:	Copper
Finish:	Silver plating

Outline Drawings

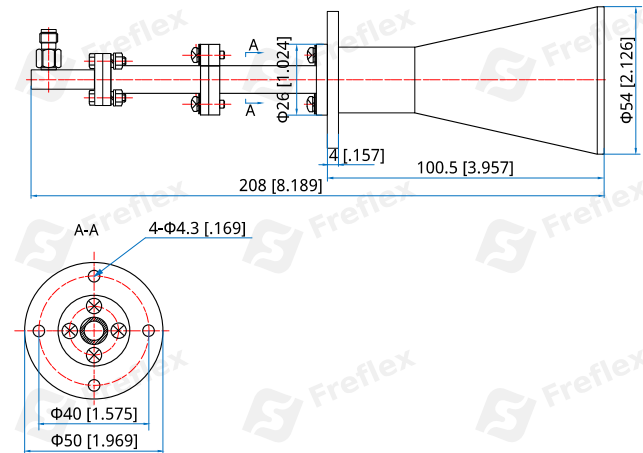

Unit: mm [in]

Tolerance: $\pm 1\text{mm}$ [$\pm 0.039\text{in}$]

How To Order

FCPHA-26500-40000-20-K

Customization is available upon request.