

FA2N

2.4mm to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: 2.4mm
N
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

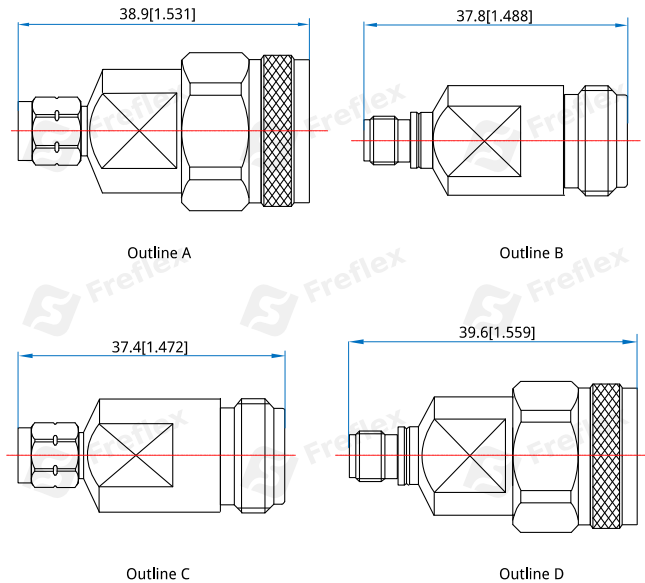

Unit: mm [in]
Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

FA2N-MM - 2.4mm (m) to N (m), Outline A

FA2N-FF - 2.4mm (f) to N (f), Outline B

FA2N-MF - 2.4mm (m) to N (f), Outline C

FA2N-FM - 2.4mm (f) to N (m), Outline D

Customization is available upon request.