


FA2S 2.4mm to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~26.5GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: 2.4mm
SMA
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PEI&PTFE
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

Outline Drawings

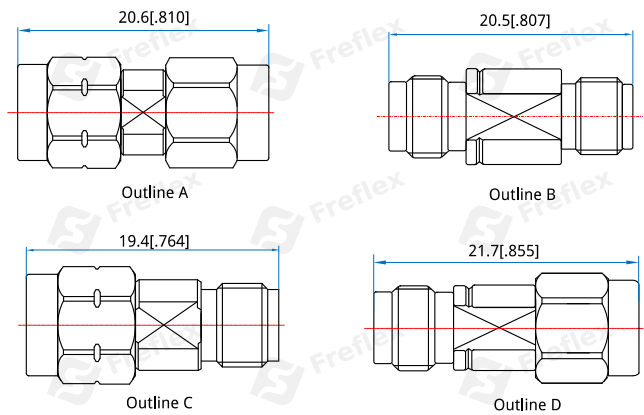

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FA2S-MM - 2.4mm(m) to SMA(m), Outline A

FA2S-FF - 2.4mm(f) to SMA(f), Outline B

FA2S-MF - 2.4mm(m) to SMA(f), Outline c

FA2S-FM - 2.4mm(f) to SMA(m), Outline D

Customization is available upon request.