

FA81

0.8mm to 1.0mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~110GHz
VSWR: 1.5 max.
Impedance: 50Ω

Mechanical

RF Connectors: 0.8mm
1.0mm
Outer Conductor: Stainless steel
Dielectric: PEI
Inner Conductor: Beryllium copper

How To Order

FA81-MM - 0.8mm (m) to 1.0mm (m), Outline A


FA81-MF - 0.8mm (m) to 1.0mm (f), Outline B

FA81-FM - 0.8mm (f) to 1.0mm (m), Outline C

FA81-FF - 0.8mm (f) to 1.0mm (f), Outline D

Customization is available upon request.

Outline Drawings

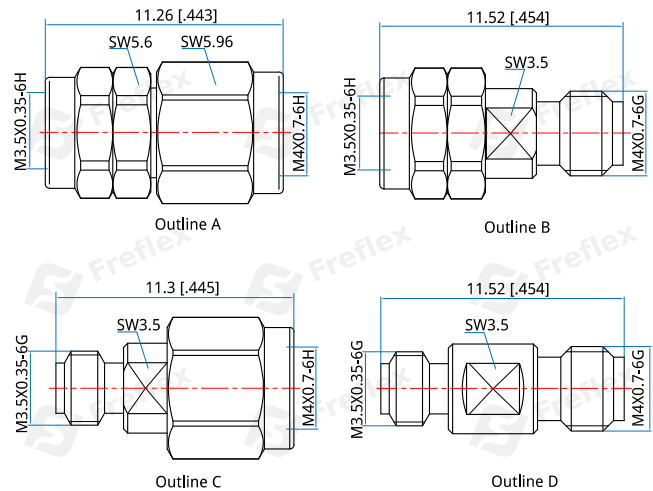

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]