

FAG2 SSMP to 2.4mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~50GHz
VSWR: 1.35 max
Impedance: 50Ω


Mechanical

RF Connectors: SSMP
2.4mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel
&Gold Plated Beryllium Copper
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

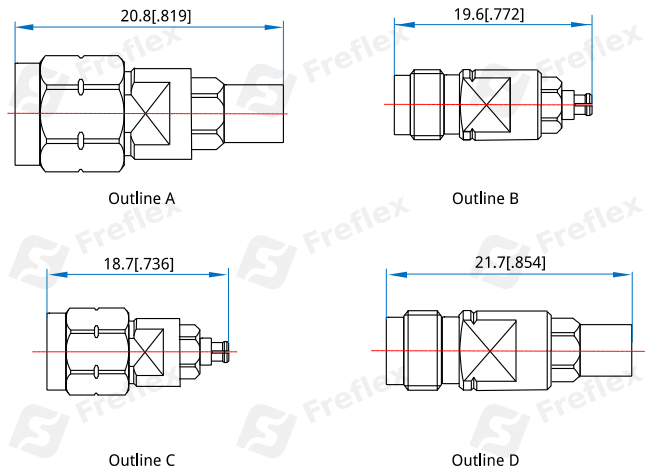

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FAG2-MM - SSMP (m) to 2.4mm (m), Outline A

FAG2-FF - SSMP (f) to 2.4mm (f), Outline B

FAG2-MF - SSMP (m) to 2.4mm (f), Outline C

FAG2-FM - SSMP (f) to 2.4mm (m), Outline D

Customization is available upon request.