

## FAKA 2.92mm to SSMA

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency:	DC~40GHz
VSWR:	1.2 max.
Insertion Loss:	0.26dB max.
Impedance:	50Ω


### Mechanical

RF Connectors:	2.92mm SSMA
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper

### Environmental

Temperature:	-55~+125°C
--------------	------------

### Outline Drawings

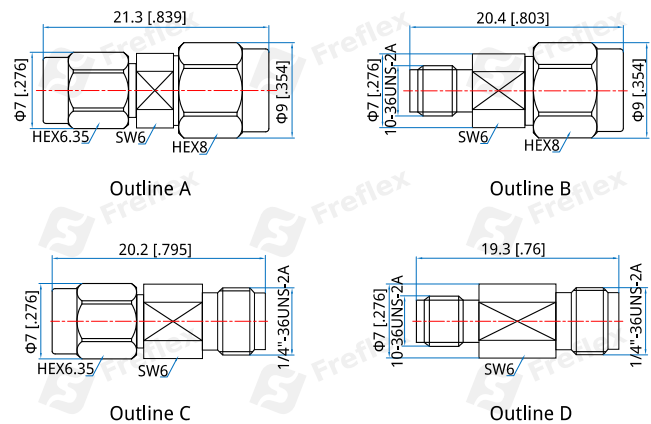

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FAKA-MM** - 2.92mm(m) to SSMA(m), Outline A

**FAKA-MF** - 2.92mm(m) to SSMA(f), Outline B

**FAKA-FM** - 2.92mm(f) to SSMA(m), Outline C

**FAKA-FF** - 2.92mm(f) to SSMA(f), Outline D

Customization is available upon request.