

FAKN 2.92mm to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.001~18GHz
VSWR:	1.15 max.
Insertion Loss:	0.04dB max.
Impedance:	50Ω


Mechanical

RF Connectors:	2.92mm N
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PEI
Inner Conductor:	Gold Plated Beryllium Copper

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings

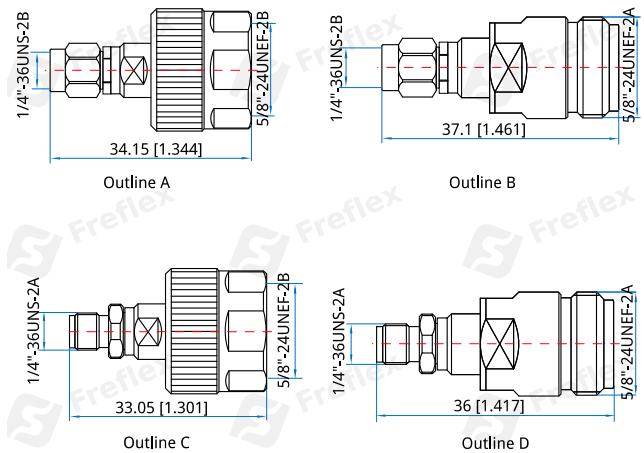

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FAKN-MM - 2.92mm(m) to N(m), Outline A

FAKN-MF - 2.92mm(m) to N(f), Outline B

FAKN-FM - 2.92mm(f) to N(m), Outline C

FAKN-FF - 2.92mm(f) to N(f), Outline D

Customization is available upon request.