

## FANJ

### N to 7.0mm

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar



#### Electrical

Frequency: DC~18GHz  
VSWR: 1.25 max.  
Impedance: 50Ω


#### Mechanical

RF Connectors: N  
7.0mm  
Outer Conductor: Passivated Stainless Steel  
Dielectric: PEI  
Inner Conductor: Gold Plated Beryllium Copper

#### Environmental

Temperature: -55~+165°C

#### Outline Drawings

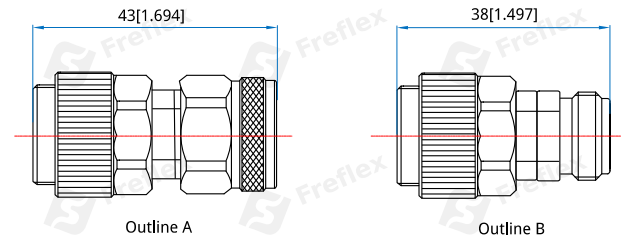

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

#### How To Order

**FANJ-M** - N(m) to 7.0mm, Outline A

**FANJ-F** - N(f) to 7.0mm, Outline B

Customization is available upon request.