

FASNEX

SMA to NEX10

Features:

* Low VSWR

Applications:

* Wireless
* Transmitter
* Laboratory Test
* Radar


Electrical

Frequency: DC~6GHz
VSWR: 1.1 (DC~3GHz)
Impedance of Dielectric: 5000MΩ min.
Impedance: 50Ω

Mechanical

RF Connectors: SMA
NEX10
Inner Conductor: Gold plated beryllium copper
Dielectric: PTFE
Outer Conductor: Ternary alloy plated brass
RoHS: Compliant

Outline Drawings

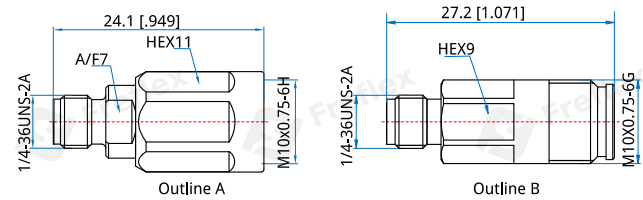

Unit: mm [in]

Tolerance: ±1mm [±0.039in]

How To Order

FASNEX-FM - SMA (f) to NEX10 (m), Outline A

FASNEX-FF - SMA (f) to NEX10 (f), Outline B

Customization is available upon request.