

## FAUU SSMB to SSMB

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: DC~6GHz  
VSWR: 1.2 max.  
Impedance: 50Ω


### Mechanical

RF Connectors: SSMB  
Mating Life Cycle: 500 cycles  
Outer Conductor: Gold plated brass  
Dielectric: PTFE  
Inner Conductor: Gold plated beryllium copper

### Environmental

Temperature: -55~+165°C

### Outline Drawings

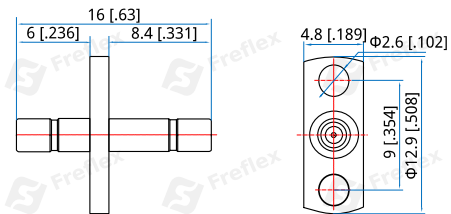

Outline A

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FAUUL-MM** - SSMB(m) to SSMB(m), Flange mount, Outline A

Customization is available upon request.