

FBAL-0.3-65000

300K~65GHz

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	300K~65GHz
Insertion Loss:	12dB max.
Isolation:	12 typ. @0.01~65GHz
Nominal Phase Shift:	180° typ.
Amplitude Balance:	3dB max.
Phase Balance:	10° max.
VSWR:	2 typ.
Input Power:	27dBm max. (0.501W)
Impedance:	50Ω

Mechanical

Size ^{*1} :	43*31.6*8mm 1.693*1.244*0.315in
Connectors:	1.85mm Female
Mounting:	4-Φ2.1mm



[1] Exclude connectors.

How To Order

FBAL-0.3-65000

Customization is available upon request.

Outline Drawings

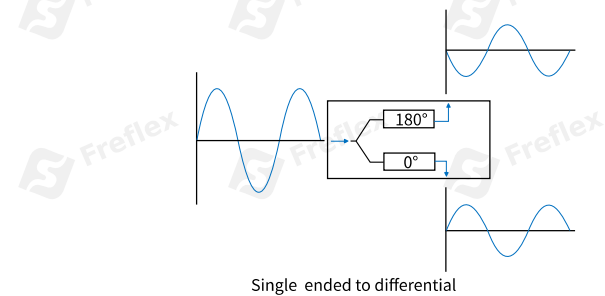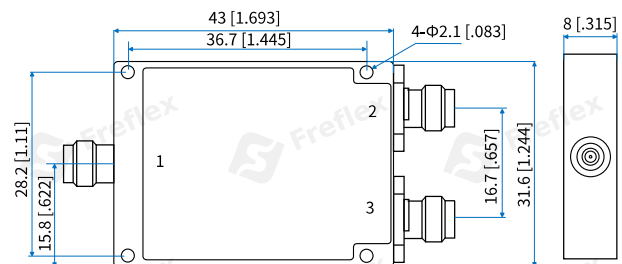

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]