

FCC-2000-4000-K25-N-1

2~4GHz, 250W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	2~4GHz
Average Power:	250W CW
Impedance:	50Ω


Temperature (°C)	VSWR (max.)	Isolation (dB min.)	Insertion Loss (dB max.)
+25	1.4	16	0.6
0~+60	1.5	15	0.7

Mechanical

Size ^{*1} :	34*37.6*35.4mm 1.339*1.48*1.394in
Connectors:	N Female
Direction:	Clockwise (1 → 2 → 3)

[1] Exclude connectors.

Outline Drawings

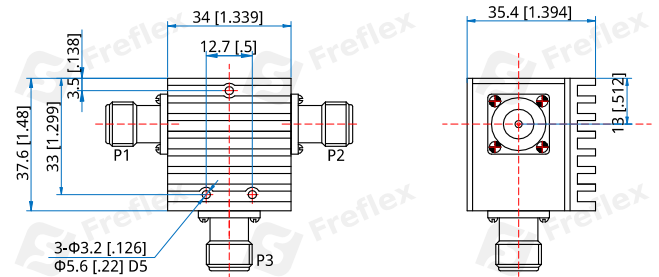

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCC-2000-4000-K25-N-1

Customization is available upon request.