

FCC-2430-2470-1K-7-1

2.43~2.47GHz, 1000W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	2.43~2.47GHz
Average Power:	1000W CW
Impedance:	50Ω


Temperature (°C)	VSWR (max.)	Isolation (dB min.)	Insertion Loss (dB max.)
+25	1.2	23	0.3
-30~+70	1.2	21	0.4

Mechanical

Size ^{*1} :	80*60*60mm 3.15*2.362*2.362in
RF Connectors:	7/16 DIN (L29) Female
Direction:	Clockwise (1 → 2 → 3)

[1] Exclude connectors.

Outline Drawings

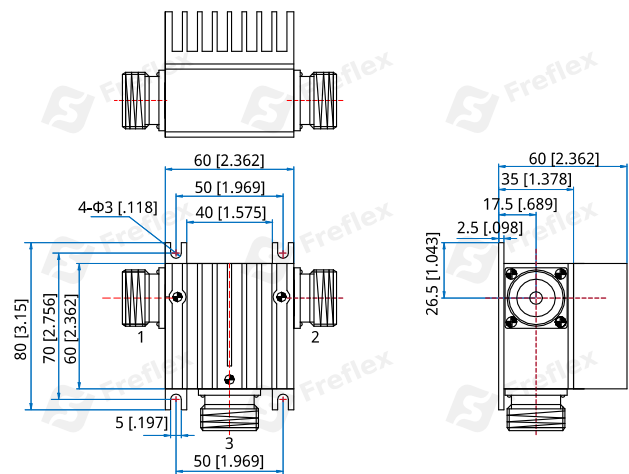

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCC-2430-2470-1K-7-1

Customization is available upon request.