



FCC-26500-40000-5-K-1

26.5~40GHz, 5W

Features: Applications:

* Broadband * Wireless

* High Power * Radar

* Low Insertion Loss * Laboratory Test

Electrical

Frequency: 26.5~40GHz
Insertion Loss: 1.6dB max.
Isolation: 14dB min.

VSWR: 1.6 max. Average Power: 5W

Mechanical

Size*1: 13*25*16.8mm

0.512*0.984*0.661in

RF Connectors: 2.92mm Female
Mounting: 3-M2.5 through-hole


Direction: Clockwise

[1] Exclude connectors.

Environmental

Temperature: -30~+70°C (1.8dB/12dB/1.80)

Outline Drawings

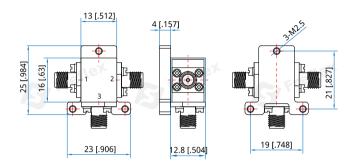

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCC-26500-40000-5-K-1

Customization is available upon request.

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.2