

# FCC-2900-3500-K6-NNM-1

## 2.9~3.5GHz, 600W

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Radar
- \* Laboratory Test

**Electrical**

Frequency:	2.9~3.5GHz
Insertion Loss:	0.5dB max.
Isolation:	17dB min.
VSWR:	1.35 max.
Average Power:	600W CW
Peak Power:	2500W(20% duty cycle)
Impedance:	50Ω

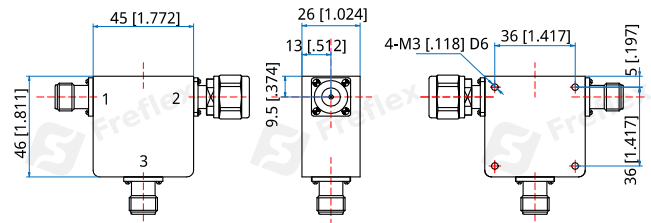
**Mechanical**

Size <sup>*1</sup> :	45*46*26mm 1.772*1.811*1.024in
RF Connectors:	N Female, N male
Mounting:	4-M3mm, depth 6mm
Direction:	Clockwise(1 → 2 → 3)

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**FCC-2900-3500-K6-NNM-1**

Customization is available upon request.