

# FCI-1000-2000-K2-K2-N-1

## 1~2GHz

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Radar
- \* Laboratory Test

**Electrical**

Frequency:	1~2GHz
Insertion Loss:	0.7dB max.
Isolation:	15dB min.
VSWR:	1.45 max.
Forward Power:	200W
Reverse Power:	200W

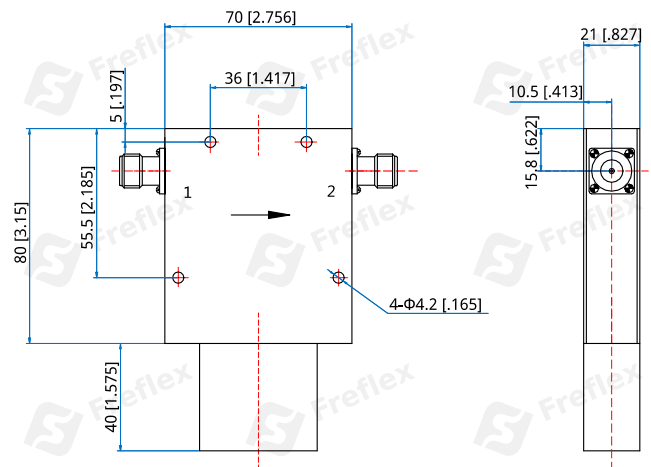
**Mechanical**

Size <sup>*1</sup> :	70*80*21mm 2.756*3.15*0.827in
Direction:	Clockwise
RF Connectors:	N Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors and termination.

**Environmental**

Temperature:	0~+60°C
--------------	---------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.15mm [±0.006in]

**How To Order**

**FCI-1000-2000-K2-K2-N-1**

Customization is available upon request.