

# FCI-1000-2000-K3-K2-N-1

1~2GHz, 300W/200W, N Female, Clockwise

Features:  
 \* Broadband  
 \* High Power  
 \* Low Insertion Loss

Applications:  
 \* Wireless  
 \* Radar  
 \* Laboratory Test

## Electrical

Frequency:	1~2GHz
VSWR:	1.6 max.
Insertion Loss:	0.6dB max.
Isolation:	16dB min.
Forward Power:	300W
Reverse Power:	200W

## Mechanical


Size <sup>*1</sup> :	64*66*26mm 2.52*2.598*1.024in
RF Connectors:	N Female
Mounting:	3-M2.5, depth 4mm
Direction:	Clockwise

[1] Exclude connectors and terminations.

## Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-55~+85°C

## Outline Drawings

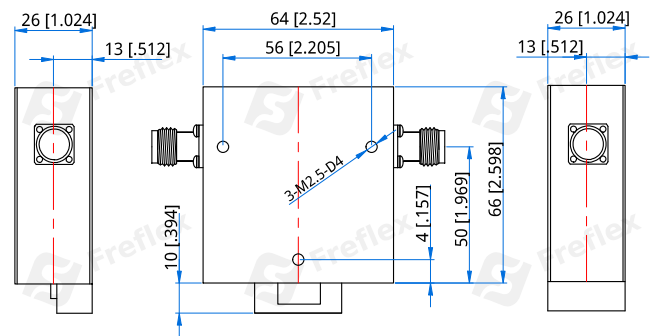

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]

## How To Order

**FCI-1000-2000-K3-K2-N-1**

Customization is available upon request.