

FCI-2000-4000-K1-K1-N-1

2~4GHz

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	2~4GHz
Forward Power:	100W
Reverse Power:	100W
Impedance:	50Ω

Temperature (°C)	Insertion Loss (dB max.)	Isolation (dB min.)	VSWR (max.)
+25	0.5	17	1.4
0~+60	0.7	15	1.5

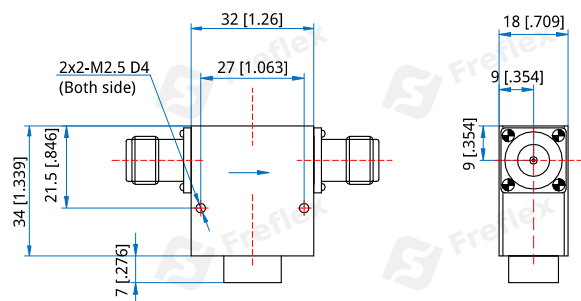
Mechanical

Size^{*1}: 32*34*18mm
1.26*1.339*0.709in

Direction: Clockwise

RF Connectors: N female

[1] Exclude connectors and termination.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCI-2000-4000-K1-K1-N-1

Customization is available upon request.