

# FCI-2400-2500-K75-K2-N-1

2.4~2.5GHz, 750W, 200W, N Female, Clockwise

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Radar
- \* Laboratory Test

**Electrical**

Frequency:	2.4~2.5GHz
Insertion Loss:	0.35dB max.
Isolation:	20dB min.
VSWR:	1.2 max.
Forward Power:	750W
Reverse Power:	200W

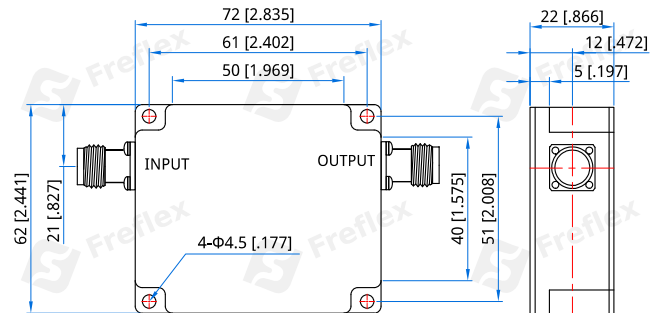
**Mechanical**

Size <sup>*1</sup> :	72*62*22mm 2.835*2.441*0.866in
Connectors:	N Female
Direction:	Clockwise

[1] Exclude connectors and terminations.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**FCI-2400-2500-K75-K2-N-1**

Customization is available upon request.