

FCI-24000-30000-5-1-K-1

24~30GHz, 5W/1W, 2.92mm Female, Clockwise

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	24~30GHz
Insertion Loss:	0.8dB max.
Isolation:	16dB min.
VSWR:	1.4 max.
Forward Power:	5W
Reverse Power:	1W

Mechanical


Size* ¹ :	12*15*13mm 0.472*0.591*0.512in
RF Connectors:	2.92mm Female
Mounting:	3-M1.6mm depth 4.5mm
Direction:	Clockwise (1 → 2)

[1] Exclude connectors.

Environmental

Operating Temperature:	-30~+70°C
------------------------	-----------

Outline Drawings

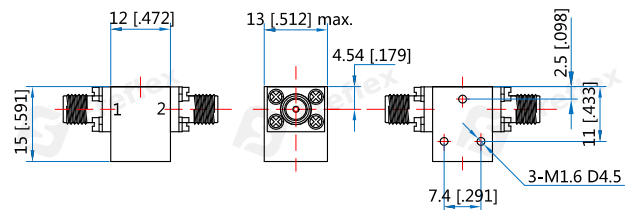

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCI-24000-30000-5-1-K-1

Customization is available upon request.