

# FCI-26500-40000-10-1-K

## 26.5~40GHz

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Radar
- \* Laboratory Test

**Electrical**

Frequency:	26.5~40GHz
Insertion Loss:	1.7dB max.
Isolation:	12dB min.
VSWR:	1.8 max.
Forward Power:	10W max.
Reverse Power:	1W max.
Impedance:	50Ω

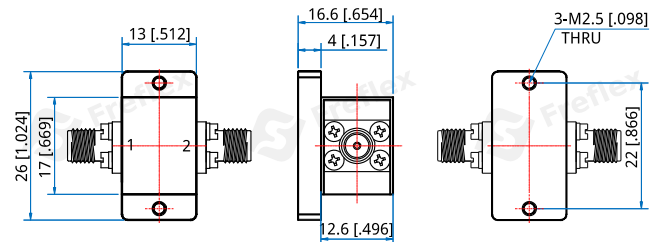
**Mechanical**

Size <sup>*1</sup> :	13*26*16.8mm 0.512*1.024*0.654in
RF Connectors:	2.92mm female
Mounting:	3-M2.5mm tapped-through-hole

[1] Exclude connectors and termination.

**Environmental**

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+105°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.25mm [±0.01in]

**How To Order**

**FCI-26500-40000-10-1-K**

Customization is available upon request.