

FCI-2900-3100-K2-K15-N-1

2.9~3.1GHz, 200W, 150W, N Female, Clockwise

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	2.9~3.1GHz
Insertion Loss:	0.4dB max.
Isolation:	18dB min.
VSWR:	1.3 max.
Peak Power:	2000W
Forward Power:	200W
Reverse Power:	150W
Impedance:	50Ω

Mechanical


Size ^{*1} :	45*46*26mm
	1.772*1.811*1.024in
Direction:	Clockwise
RF Connectors:	N Female
Mounting:	4-M3mm, depth 6mm

[1] Exclude connectors and termination.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

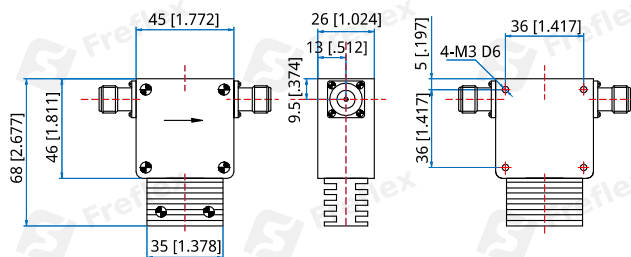

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FCI-2900-3100-K2-K15-N-1

Customization is available upon request.