

# FCI-5600-5800-K2-50-N-1

## 5.6~5.8GHz

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Radar
- \* Laboratory Test

**Electrical**

Frequency:	5.6~5.8GHz
Insertion Loss:	0.3dB max.
Isolation:	20dB min.
VSWR:	1.25 max.
Forward Power:	200W
Reverse Power:	50W

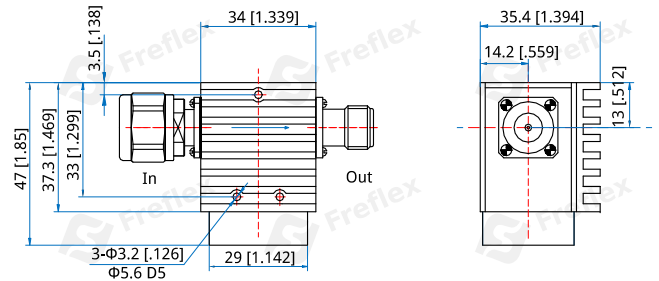
**Mechanical**

Size <sup>*1</sup> :	34*47*35.4mm 1.339*1.85*1.394in
RF Connectors:	N Male N Female
Mounting:	3-Φ3.2mm through-hole

[1] Exclude connectors and termination.

**Environmental**

Temperature:	0~+60°C
--------------	---------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**FCI-5600-5800-K2-50-N-1**

Customization is available upon request.