

FCT50R5

DC~50GHz, 0.5W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching

Electrical

Frequency Range:	DC~50GHz
Average Power:	0.5W
Impedance:	50Ω
VSWR:	1.3 max. (DC~40GHz) 1.4 max. (DC~50GHz)


Mechanical

Connectors:	2.4mm
Outer Conductor:	Passivated stainless steel
Inner Conductor:	Gold plated beryllium copper
Dielectric:	PEI

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings

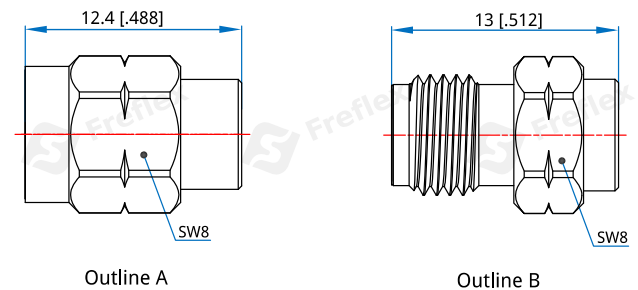

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

FCT50R5-X-Y

X: Frequency in GHz

Y: Connector type

Connector naming rules:

2 - 2.4mm male (Outline A)

2F - 2.4mm female (Outline B)

Examples:

To order a termination, DC-50GHz, 2.4mm male, specify FCT50R5-50-2.

Customization is available upon request.