

FCSDC-4000-8000-20-S

4~8GHz, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

| | |
|-----------------|--------|
| Frequency: | 4~8GHz |
| Coupling: | 20±1dB |
| Insertion Loss: | -0.2dB |
| VSWR: | 1.22 |
| Impedance: | 50Ω |


Mechanical

| | |
|-------------|---------------------------------------|
| Size: | 61*25.5*12.9mm 2.402*1.004*0.508in |
| Connectors: | SMA female |
| Cavity: | Aluminum alloy |
| Weight: | 50g max. |
| Mounting: | 2-Φ2.8mm through-hole |

Environmental

| | |
|----------------------------|----------------|
| Operation Temperature: | 4K (-269.15°C) |
| Non-operation Temperature: | -55~+85°C |

Outline Drawings

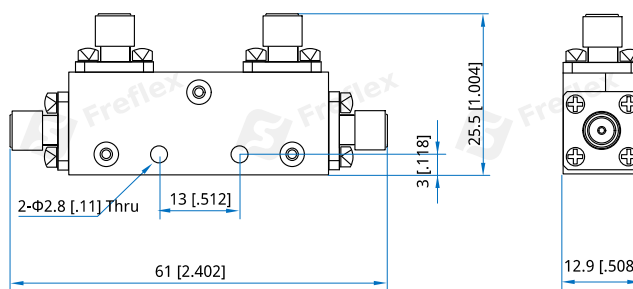

Unit: mm [in]

Tolerance: .x±1mm [±0.039in]

How To Order

FCSDC-4000-8000-20-S

Customization is available upon request.