

FDB-50-8000-3K-NNF

0.05~8GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

Frequency Range:	0.05~8GHz
Insertion Loss:	0.5dB max.
VSWR:	1.5 max.
Impedance:	50Ω
Voltage:	3000V max.
Average Power:	200W@25°C


Mechanical

Connectors:	N
Outer Conductors:	Ternary alloy plated copper
Housing:	Aluminum & Nylon
Male Inner Conductors:	Sliver plated brass
Female Inner Conductors:	Gold plated beryllium copper

Environmental

Temperature:	-45~+55°C
--------------	-----------

Outline Drawings

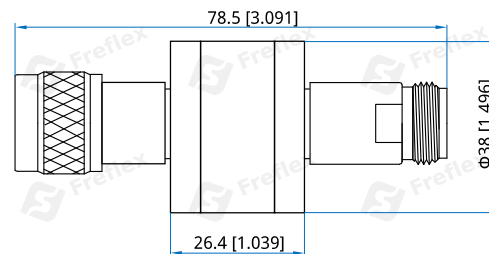

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

FDB-50-8000-3K-NNF

Customization is available upon request.