

FDB-9K-8000

9KHz~8GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

Frequency Range:	9K~8GHz
Insertion Loss:	0.4dB max.
VSWR:	1.25 max.
Impedance:	50Ω
Voltage:	75V max.

Mechanical

Connectors: SMA, N

Environmental

Operation Temperature:	-35~+75°C
Storage temperature:	-45~+85°C

How To Order

FDB-9K-8000-SFSF - Outline A


FDB-9K-8000-SSF - Outline B

FDB-9K-8000-NFNF - Outline C

FDB-9K-8000-NNF - Outline D

Customization is available upon request.

Typical Performance Curves

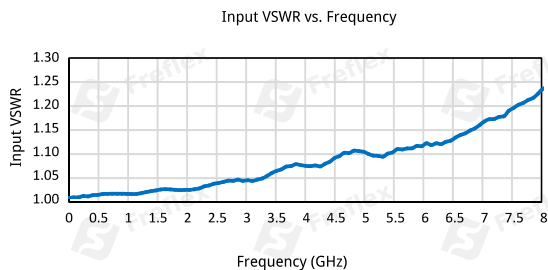

Outline Drawings

