

FDH-10-40000-N-2S

0.01~40GHz

Features:

- * Broadband
- * High Sensitivity

Applications:

- * Telecom
- * Instrumentation
- * Laboratory Test
- * Radar

Electrical

Frequency Range:	0.01~40GHz
Sensitivity:	350mV/mW typ.
Flatness:	±1.75dB
VSWR:	2 max.
Polarity:	Negative
Input Power:	20dBm max.
Rise Time:	10nS
Falling Time:	10nS
Impedance:	50Ω


Mechanical

Size:	Φ9.5*35.7mm
	Φ0.374*1.406in
Input Connector:	2.4mm Male
Output Connector:	SMA Female

Environmental

Operating Temperature:	-20~+70°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

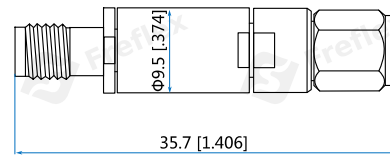

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FDH-10-40000-N-2S

Customization is available upon request.