

FDPS-300-3000-360-6

0.3~3GHz, 360°, 6Bits

Features:

- * Broadband
- * High Reliable

Applications:

- * Laboratory Test
- * Instrumentation

Electrical

Frequency:	0.3~3GHz
Insertion Loss:	20dB max.
Phase Range:	360° typ.
Control Bits:	6 Bits
Step:	5.625° typ.
Phase Flatness:	±3° typ.
Phase Accuracy:	±3° typ.
VSWR:	2 max.
Voltage/Current:	-5V/0.01A
Impedance:	50Ω
Power:	24dBm max.
TTL Control Voltage:	0: 0V 1: +5V

Mechanical

RF Connectors:	N Female, SMA Female
Power Supply Connectors:	JL5-8TJW-2
Weight:	16g
Material:	Aluminum

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Control True Table

Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
E6	E5	E4	E3	E2	E1	GND	VEE


How To Order

FDPS-300-3000-360-6 - N Female, Outline A

FDPS-300-3000-360-6-1 - SMA Female, Outline B

Customization is available upon request.

Outline Drawings

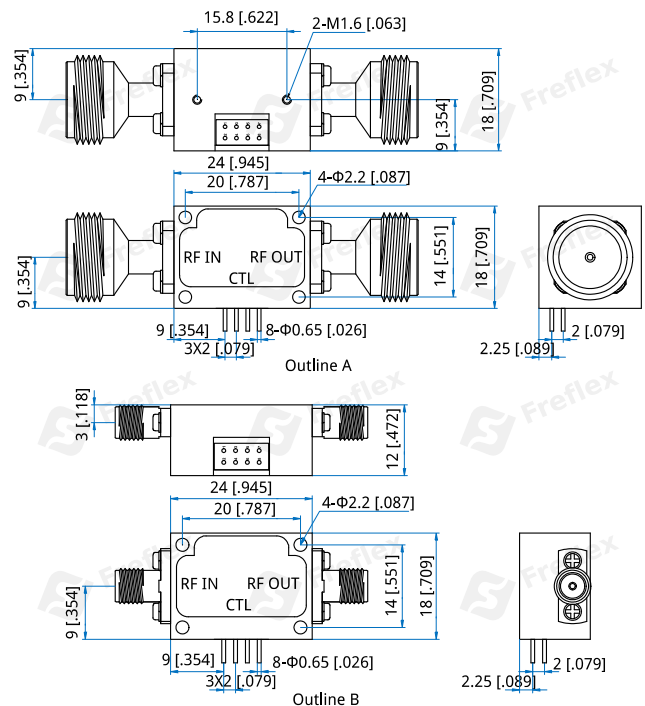

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Logic Table

E1	E2	E3	E4	E5	E6	VEE
0	0	0	0	0	0	0
1	0	0	0	0	0	-5.625°
0	1	0	0	0	0	-11.25°
0	0	1	0	0	0	-22.5°
0	0	0	1	0	0	-45°
0	0	0	0	1	0	-90°
0	0	0	0	0	1	-180°
1	1	1	1	1	1	-354.375°