

## FDA-0.1-18000-31.5-0.5


0.1MHz~18GHz, 31.5dB, 0.5dB

**Features:**

- \* Broadband
- \* High Dynamic Range

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar


**Electrical**

Frequency:	0.1MHz~18GHz
Insertion Loss:	6dB max.
Step:	0.5dB
Attenuation Range:	0~31.5dB
Attenuation Accuracy:	±1dB typ.
VSWR:	1.5 typ.
Voltage/Current:	-5V @15mA typ.

**Absolute Maximum Ratings\*1**

Voltage:	-6V max.
Input Power:	+27dBm max.

[1] Permanent damage may occur if any of these limits are exceeded.

**Mechanical**

Size*2:	26*26*12mm 1.024*1.024*0.472in
RF Connectors:	2.92mm Female
Switching Time:	50ns max.
Power Supply & Control	30J-9ZKP
Interface Connectors:	
Mounting:	4-Φ2.8mm through-hole
Logic Input:	On: 1( +3~+5V) Off: 0( 0~+0.5V)

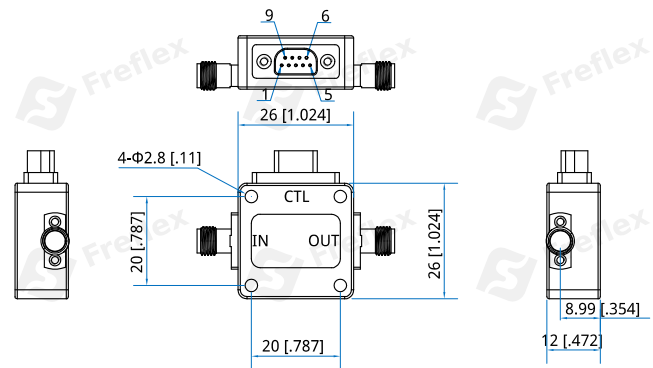
[2] Exclude connectors.

**Pin Numbering**

Pin	Function	Pin	Function
1	C1:-0.5dB	6	C6:-16dB
2	C2:-1dB	7	VEE
3	C3:-2dB	8	NC
4	C4:-4dB	9	GND
5	C5:-8dB		

**Environmental**

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**Logic Table**

State	C1	C2	C3	C4	C5	C6	VEE	Attenuation State
-	0	0	0	0	0	0	-5V	Reference IL
1	1	0	0	0	0	0	-5V	0.5dB
2	0	1	0	0	0	0	-5V	1dB
3	0	0	1	0	0	0	-5V	2dB
4	0	0	0	1	0	0	-5V	4dB
5	0	0	0	0	1	0	-5V	8dB
6	0	0	0	0	0	1	-5V	16dB
7	1	1	1	1	1	1	-5V	31.5dB

**How To Order**

[FDA-0.1-18000-31.5-0.5](#)

Customization is available upon request.

## Typical Performance Curves

