

FDDC-0.004-400-K3-50-N

4KHz~0.4GHz, 300W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

| | |
|--------------------|-------------|
| Frequency: | 4KHz~0.4GHz |
| Coupling: | 50±1dB |
| Coupling Flatness: | ±0.6dB max. |
| VSWR (Mainline): | 1.3 max. |
| Insertion Loss: | 0.4dB max. |
| Directivity: | 18dB min. |
| Average Power: | 300W |

Mechanical


| | |
|-------------|--------------------------------------|
| Size*1: | 152.4*55.9*55.9mm 6*2.201*2.201in |
| Connectors: | N female |
| Mounting: | 4-M3-6H Deep8 |

[1] Exclude connectors

Environmental

| | |
|------------------------|-----------|
| Operating Temperature: | -55~+85°C |
|------------------------|-----------|

Outline Drawings

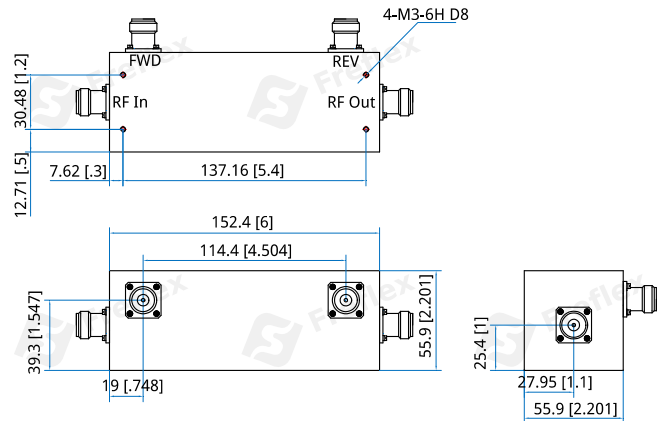

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

*Ensure dimensions for design.

How To Order

FDDC-0.004-400-K3-50-N

Customization is available upon request.