

FDDC-0.009-250-10K-60-A1N

9KHz~250MHz, 10KW, 60dB

Features:
* Low Insertion Loss

Applications:
* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	9KHz~250MHz
Coupling:	60±1dB
Coupling Flatness:	±1dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.2dB max.
Directivity:	20dB min. @9KHz-100MHz 15dB min. @100MHz-250MHz
Power Handling:	10KW CW

Mechanical


Size ^{*1} :	300*100*100mm 11.811*3.937*3.937in
RF Connectors:	1-5/8" (IF70)
Coupling Connectors:	N female
Mounting:	4-M5-D10mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

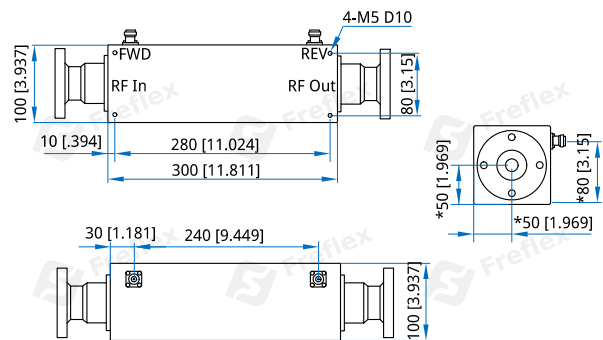

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

FDDC-0.009-250-10K-60-A1N

Customization is available upon request.