

FDDC-0.009-400-K5-50-NS

9KHz~400MHz, 500W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	9KHz~400MHz
Coupling:	50±1dB
Coupling Flatness:	±0.6dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.4dB max.
Directivity:	18dB min.
Average Power:	500W CW

Mechanical


Size* ¹ :	152.4*55.9*55.9mm 6*2.201*2.201in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M3-6H Depth 8mm

^[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

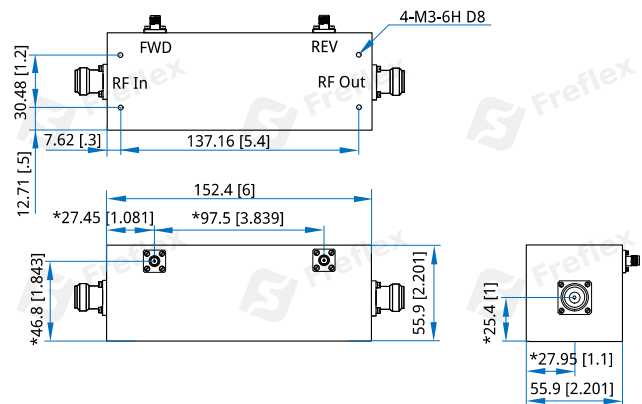

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

*Ensure dimensions for design.

How To Order

FDDC-0.009-400-K5-50-NS

Customization is available upon request.