

FDDC-100-225-10K-60-A1N

0.1~0.225GHz, 10KW, 60dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.1~0.225GHz
Insertion Loss:	0.05dB max.
Coupling:	60±1dB
Coupling Flatness:	±0.2dB max.
Directivity:	25dB min.
VSWR (Mainline):	1.1 max.
Average Power:	10KW

Mechanical


Size*1:	145*100*70mm 5.709*3.937*2.756in
RF Connectors:	1-5/8" (IF70)
Coupling Connectors:	N Female
Mounting:	3-Φ6.8mm through-hole

[1] Exclude connectors and flanges.

Environmental

Operating Temperature:	-55~+75°C
------------------------	-----------

Outline Drawings

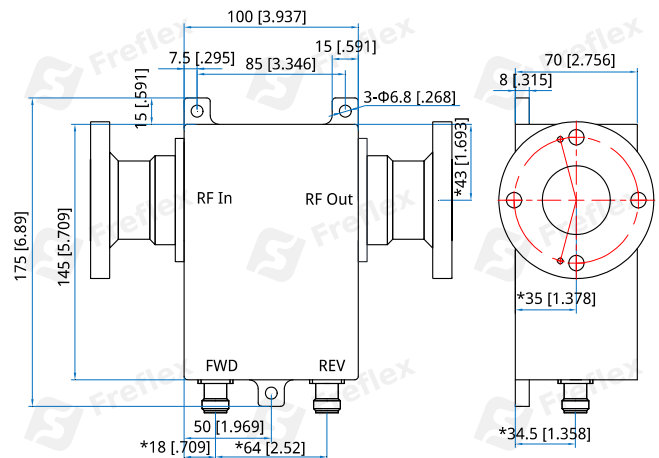

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

*Ensure dimensions for design.

How To Order

FDDC-100-225-10K-60-A1N

Customization is available upon request.